


SOLID 2

Quality 2 channel amplifier

- Small size
Easy integration in a vehicle

- Aluminum chassis
High thermal dissipation

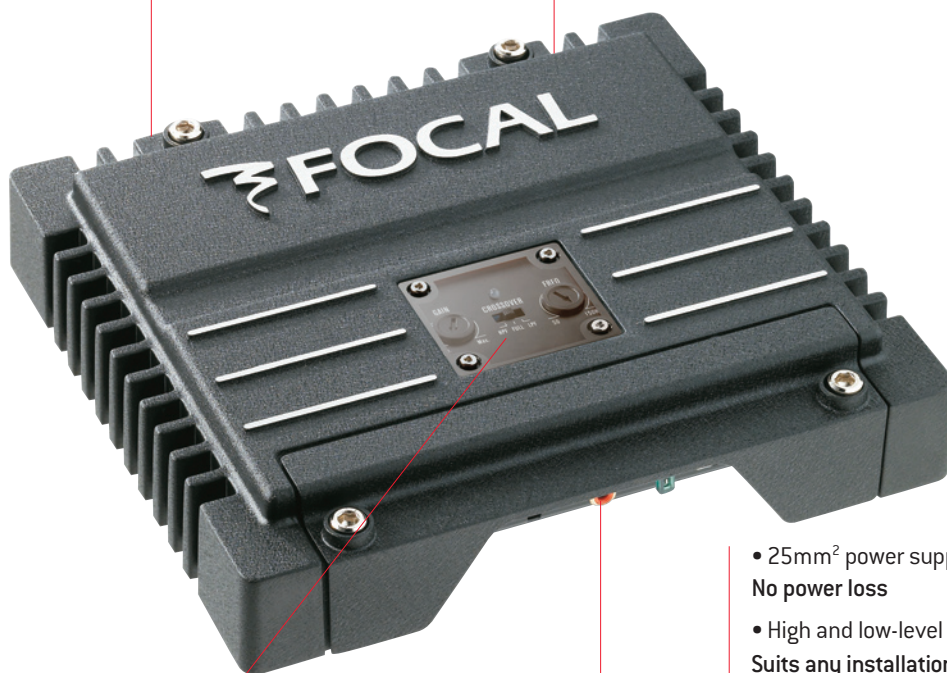

- High-pass and low-pass crossover
Numerous settings available

- 25mm² power supply terminal
No power loss
- High and low-level inputs
Suits any installation
- "Auto Power On" on the high-level input
Easy wiring
- High safety
Protection against any electrical damages
- Balanced inputs
Floating ground, no parasite nor other noises

Technical characteristics:

Power under 4 Ohms: 2x75W

Power under 2 Ohms: 2x100W

Bridged mode under 4 Ohms: 1x200W

Frequency response: 10Hz–60kHz

Signal/noise ratio: >77dB (A)

Adjustable gain

Dimensions (HxLxD): 45x220x200mm

Protections: Short-circuit, continuous current, thermal overload



It makes the difference:

- Very compact aluminum chassis
- High-level input, fits the original system
- Secure and easily accessible settings
- Aluminum chassis

