

SYSTEM Mille



MLK 3 250 Watt

Technical Specifications

Component	3 way System	
Size (mm)	ML 1600 Woofer	165 (6 ¹¹ / ₂)
	ML 500 R Midrange	117x15
	ML 280 Tweeter	28 (1 ¹¹ / ₈)
Power Handling (Watt)	peak	350
	cont. program	175
Impedance	Ω	4
Frequency response	Hz	40 ÷ 25k
Sensitivity	dB/SPL	93
Crossover included	900/4.5k Hz@12/12-6/12 dB Oct.	
Component Adjustment	Tweeter, Midrange	0 ÷ -4,5 dB
Sound Control	TAD® - HFC®	
Outer diameter (mm)	Woofer	168
	Midrange	168x88
	Tweeter	52
Mounting hole diameter (mm)	Woofer	144
	Midrange	156x65
	Tweeter	47
Magnet size (mm)	Woofer	80
	Midrange	-
	Tweeter	38
Total depth (mm)	Woofer	79,5
	Midrange	21,5
	Tweeter big chamber	35
	Tweeter small chamber	27
Mounting depth	Woofer	75,5
	Midrange	10
	Tweeter big chamber	23
	Tweeter small chamber	14
Weight of one depth (kg)	Woofer	1,222
	Midrange	0,640
	Tweeter big chamber	0,094
	Tweeter small chamber	0,091
Voice coil diameter	Woofer	36
	Midrange	-
	Tweeter	28



Unparalleled quality; the Klippel Quality Control System is our actual guarantee to always produce a product entirely in compliance with the most challenging international standards.

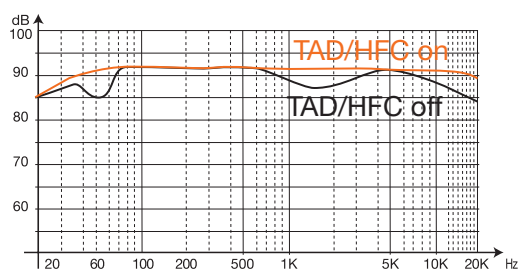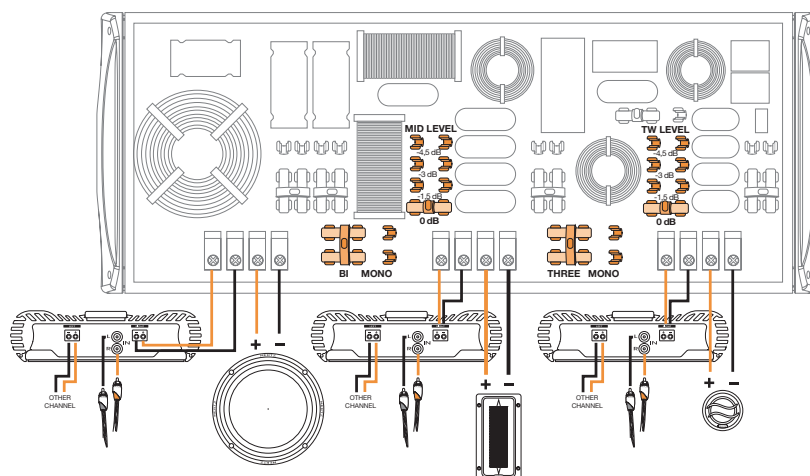

tad HFC

